

## Wristwatch type Hot Line Proximity Alarm

# Type HXW-6W



Auxiliary voltage detection device that gives alarm sounding at a distance when approach to a live line.



MADE IN JAPAN

### FEATURES

- Alarm sound of electronic buzzer when approaching to live line is detected.
- It is ideal for preventing human errors, as there is no power switch and it is always on stand-by.

### Rating and Specifications

Type	HXW-6W	
Working Voltage range	1kV to 42kV	
Standard Distance for Operation Start	60cm against 6.6kV (3.8kV to ground) * Under Hasegawa's standard conditions.	
Frequency	Both 50 and 60Hz	
Display	Light	Observable under brightness of 8,000Lx
	Sound	65dB or more (60cm apart)
Operating Temperature range	-10°C ~ +40°C	
Battery	CR1620 (3V) × 1pcs	
Battery Life (With New Battery)	Continuously Operating State: About 15hr.	
	Unused State: About 10months.	
Waterproof Performance	Conform to IPX4	
Weight	About 35 g	
Dimensions	(W) 77mm×(D) 40mm×(T) 14mm	


HASEGAWA ELECTRIC CO., LTD

<http://www.hasegawa-elec.co.jp> infor@hasegawa-elec.co.jp

# Operation Voltage-Distance (Theoretical value)

Operation Voltage-Distance Table (Theoretical value)

Nominal Voltage	Operation Distance
6.6kV	0.6m
11kV	0.8m
22kV	1.1m
33kV	1.3m

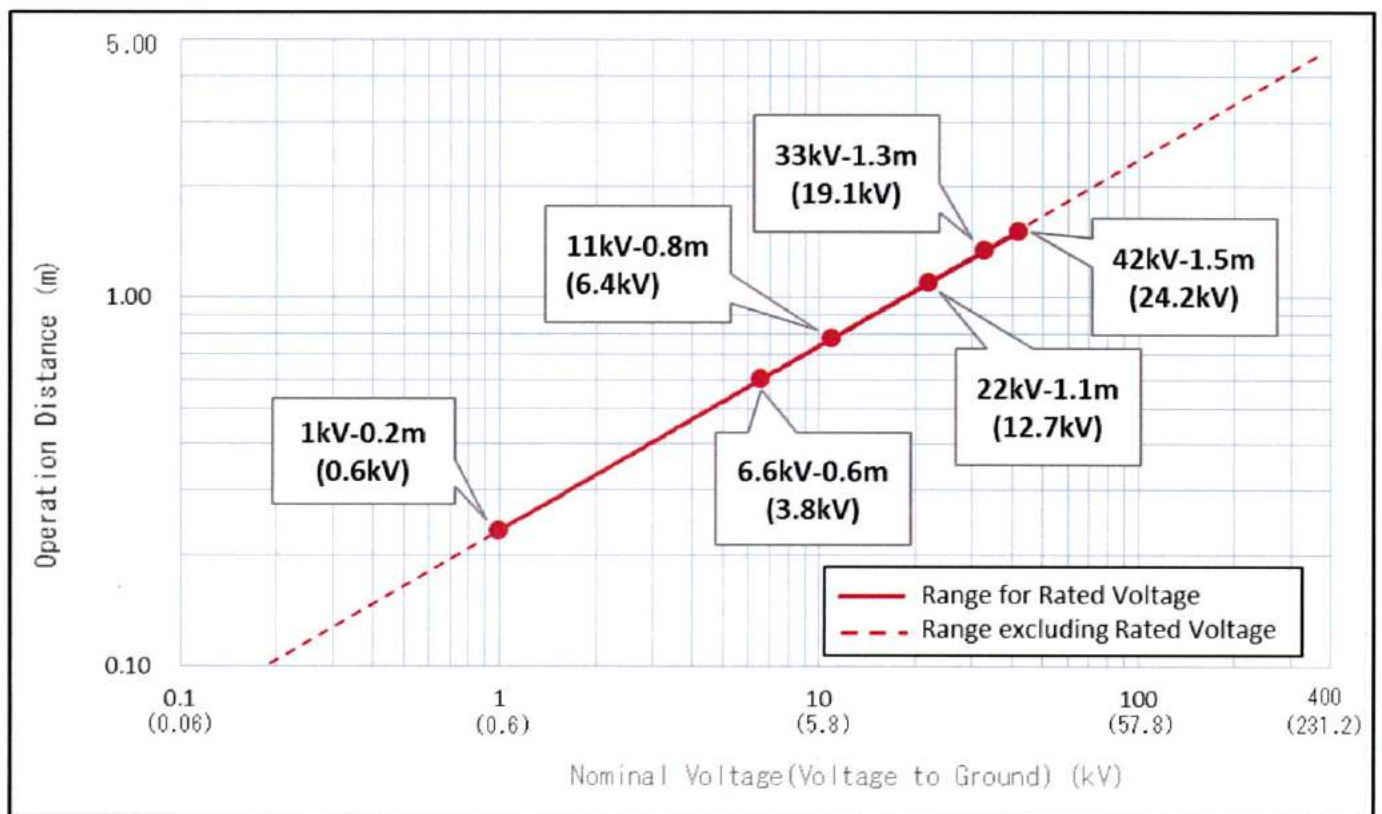

Operation Voltage-Distance graph (Theoretical value)

**\* Operation Voltage-Distance Table and graph are theoretical value.**  
**Operation distance is varied depending on the actual surrounding environment.**  
**Please confirm operation distance in actual use environment before using.**